# TPC-1750H

### 17" SXGA TFT LED LCD Intel® Atom™ **Thin Client Terminals**



#### **Features**

- Industrial 17" SXGA TFT LCD with 50K Lifetime LED Backlight
- Intel Atom N270 1.6GHz Ultra Low Voltage processor
- Compact Fanless Embedded System & Energy Star approved •
- Low-power and Econmical panel pc with sufficient I/O connectors
- IP65 Approved Front Protection & Panel Mounting
- More Durable 5-wire Resistive Touch Screen
- Al Alloy Front Bezel and Steel rear cover
- Support Windows, Linux and Android
- Data Storage can be expanded by optional SATA HDD kit
- Support VESA, Desktop and Wall Mounting by optional mounting kit

## Introduction

TPC-1750H touch panel computer with a 17" SVGA LCD, low power embedded Intel Atom N270 1.6GHz processor and 2GB DDR2 SDRAM targets at low-power, essential and economical requirements. The compact fanless design still provide the sufficient I/O connectors. Except for Compact Flash storage, data storage of TPC-1750H can be expanded by optional SATA HDD kit. To enhance its durability, TPC-1750H is designed with IP65 front protection, die-cast Al Alloy front bezel and 5-wire resistive touch. The requirement of VESA, Wall mounting or Desktop mounting can be fulfilled by the optional mounting kit.

# **Specifications**

#### General

aonorai	
BIOS	Award <sup>®</sup> 4Mbit
<ul> <li>Certification</li> </ul>	BSMI, CCC, CE, FCC Class A, UL
<ul> <li>Cooling System</li> </ul>	Fanless design
<ul> <li>Dimensions (W x H x D)</li> </ul>	413.7 x 347.2 x 63.8 (16.28" x 13.68" x 2.5")
<ul> <li>Enclosure</li> </ul>	Front bezel: Die-cast aluminum alloy
	Back housing: SECC
<ul> <li>Mounting</li> </ul>	Desktop, Wall or Panel Mount
<ul> <li>OS Support</li> </ul>	Microsoft <sup>®</sup> Windows <sup>®</sup> 7/XPE/WES
	Windows CE 5.0/6.0 with Java Script
	Linux with Firefox explorer and Java Script plugin
Power Consumption	43W (typical)
<ul> <li>Power Input</li> </ul>	18 ~ 32 V <sub>DC</sub>
<ul> <li>Watchdog Timer</li> </ul>	1 ~ 255 sec (system)
<ul> <li>Weight (Net)</li> </ul>	3.5 kg (7.71 lb)
System Hardware	
• CPU	Intel® Atom™ N270 1.6 GHz
<ul> <li>Chipset</li> <li>Moment</li> </ul>	Intel® 945GSE+ICH7M
<ul> <li>Memory</li> </ul>	2GB SO-DIMM DDR2 667 SDRAM

10/100/1000Base-T x 2

Optional, external 2.5" SATA HDD kit RS-232 x1, RS-232/422/485 x 1

CFast slot x 1

USB 2.0 x 2 (Host)

#### Lifespan Light Transmission Resolution


Type

Touchscreen

#### Environment

- Humidity
- Ingress Protection

### **Rear View**



- SXGA TFT LED LCD 17" Max. Resolution 1280 x 1024 262 K 350
- Luminance cd/m<sup>2</sup>
- Viewing Angle (H/V°)
- Backlight Life 50.000 hrs 1000:1
- **Contrast Ratio**

170/160

All product specifications are subject to change without notice

(Operating, random vibration)

Linearity 5-wire, analog resistive

10 million touches at single point

- 10 ~ 95% RH @ 40°C, non-condensing
- Front panel: IP65

Above 75%

- -20 ~ 60°C (-4 ~ 140°F)
- 2 Grms (5 ~ 500 Hz)

AD\ANTECH **Automation Panel PCs** 

#### **Operating Temperature** 0 ~ 55°C (32 ~ 131°F) Storage Temperature Vibration Protection

- Memory
- LAN
- Storage

**LCD** Display


Display Type

Max. Colors

**Display Size** 

I/O

# **TPC-1750H**

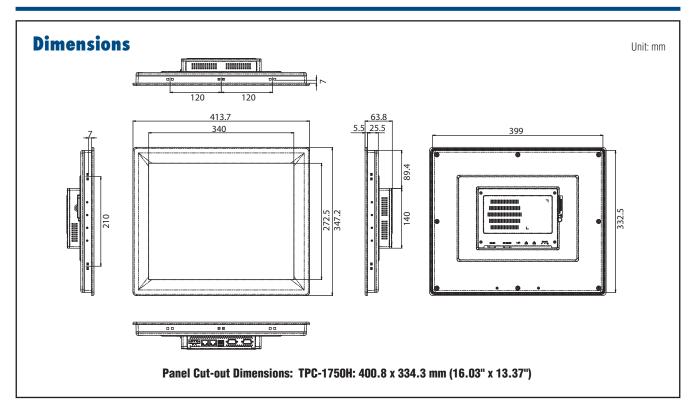

# **Ordering Information**

#### TPC-1750H-N2BE

- 17" SXGA, Touch Panel PC, Atom™ N270 1.6GHz, 2GB
- WA-TPC1750

- TPC-1750H-N2BE with WebAccess software

Power Cable EU Plug 1.8 M Power Cable UK Plug 1.8 M

TPC Stand kit from 10" to 17" TPC

PanelExpress V2.0 300 tags S/W license

PanelExpress V2.0 S/W USB dongle

# Accessories

- PWR-247-BE 63W DC 24V/2.62A Output Power Supply
- TPC-651H-EHKE
- HDD extension kit • 1702002600 Power Cable US Plug 1.8 M
- **1702002605**
- 1702031801
- **1700000596**
- Power Cable China/Australia Plug 1.8 M TPC-1000H-WMKE TPC VESA Mounting Kit from 10" to 17" TPC
- TPC-1000H-SMKE

# **Automation Software**

- 968WEXP003X
- 968WEXP015X
- PanelExpress V2.0 1500 tags S/W license 968WEXP050X PanelExpress V2.0 5000 tags S/W license
- 968WEXP2USB

**Application Software** 

susiÂccess	Version : V2.1 or above An innovative remote device management software, allowing efficient remote monitoring, quick recovery & backup, and real-time remote configuration, to create a more intelligent and interconnected embedded computing solution.
WebAcc -ss	Version : V7.1 or above WebAccess, as the core of Advantech's IoT solution, is full web browser-based software package for HMI and SCADA software. All HMI and SCADA software features including: Animated Graphics Displays, Real-time Data, Control, Trends, Alarms and Logs, are available in a standard web browser. WebAccess is built around the latest internet technologies. With its open architecture, vertical domain applications can easily be integrated.
PANELEXPRESS	Version : V2.0.3.8 or above Panel Express, a windows based HMI mini SCADA, realizes the cross platform flexibility offered by WebOP Designer to switch hardware for the consideration of cost and performance become an easy job. Panel Express software provides the best economic and express solution for data intensive high-end HMI applications.
Webop	Version : V2.0.3.8 or above An easy to use integrated development tool featuring solution-oriented screen objects, high-end graphics, Windows fonts for multi-language applications. WebOP runtime, a part of WebOP Designer, guarantees reliability and performance because of the minimum system overhead, high communication data rates, and sub-second screen switching.