

EKI-2706E-1GFP/I

EKI-2706G-1GFP/I

4FE+1GE+1G SFP Unmanaged
Industrial PoE Switch

5GE+1G SFP Unmanaged
Industrial PoE Switch



Features

- Supports 10/100/1000 Mbps Auto Negotiation (EKI-2706G)
- Supports jumbo frame transmission up to 9 kbytes
- DIN-rail with IP30 metal mechanism
- Redundant 48 V_{DC} power input
- Provides broadcast storm protection
- 4 x IEEE 802.3 af/at PoE ports + 1 x Gigabit Copper + 1 Gigabit SFP ports

Introduction

The EKI-2706 series support 48V_{DC} redundant power input and is secured with a double protection mechanism: Power Polarity Reverse Protect and an Overload Current Resettable Fuse. The EKI-2706 series support up to 4-port IEEE 802.3 af/at PoE ports, it is more convenient for users to power up their devices. Each port of EKI-2706 has 2 LED's to show the link status transmission speed and collision status. It also provides a relay output for an event alarm. In the event of a power failure, the built-in LED will activate the alarm to notify administrators. Engineers can simply verify the hardware status by checking the LED, and have troubleshooting easy and quick. EKI-2706 comes with compact metal housing that rates IP30 to help against from dusty industrial environments.

Specifications

Communications

- **Standard** IEEE 802.3, 802.3u, 802.3x, 802.1ab, 802.1z
- **LAN** EKI-2706E-1GFP/I :
4 x 10/100Mbps(RJ-45)+1 x 100/1000Mbps(RJ-45)+1
x 100/1000Mbps(SFP)
EKI-2706G-1GFP/I :
5 x 100/1000Mbps(RJ-45)+1 x 100/1000Mbps(SFP)
- **Transmission Distance** Ethernet: Up to 100 m (4-wire Cat.5e, Cat.6 RJ45 cable)
SFP: Up to 110 km (depends on SFP)
- **Transmission Speed** Ethernet: 10/100 Mbps Auto-Negotiation
Gigabit Copper: 10/100/1000 Mbps, Auto-Negotiation
Gigabit Fiber: Up to 1000 Mbps

Interface

- **Connectors** 5 x RJ-45 + 1 x SFP
6-pin removable screw terminal (power & relay)
- **LED Indicators** P1, P2, P-Fail
Link / Speed / Activity

Power

- **Power Consumption** Max. 2 W
- **Power Input** 48 V_{DC}
- **Fault Output** 1 Relay Output, 1 A @ 24 V_{DC}
- **Power Budget** 90W

Mechanism

- **Dimensions (W x H x D)** 30 x 140 x 95 mm (1.18" x 5.51" x 3.74")
- **Enclosure** IP30, metal shell with solid mounting kits
- **Mounting** DIN-rail, Wall

Protection

- **Power Reverse** Present
- **Overload current** Present

Environment

- **Operating Temperature** -40 ~ 75°C (-40 ~ 167°F)
- **Storage Temperature** -40 ~ 85°C (-40 ~ 185°F)
- **Operating Humidity** 10 ~ 95% (non-condensing)
- **Storage Humidity** 10 ~ 95% (non-condensing)
- **MTBF** TBC

Certification


- **Safety** EN61010
- **EMI** FCC Part 15 Subpart B Class A, EN 55022 Class A
- **EMS** EN 61000-4-2
EN 61000-4-3
EN 61000-4-4
EN 61000-4-5
EN 61000-4-6
EN 61000-4-8
- **Shock** IEC 60068-2-27
- **Freefall** IEC 60068-2-32
- **Vibration** IEC 60068-2-6
- **Vibration** IEC 60068-2-6

Ordering Information

- **EKI-2706E-1GFP** 4FE+1GE+1G SFP Unmanaged Industrial PoE Switch
- **EKI-2706E-1GFPI** 4FE+1GE+1G SFP Unmanaged Industrial PoE Switch w/Wide temp.
- **EKI-2706G-1GFP** 5GE+1G SFP Unmanaged Industrial PoE Switch
- **EKI-2706G-1GFPI** 5GE+1G SFP Unmanaged Industrial PoE Switch w/ Wide temp.

Dimensions

Unit: [mm]

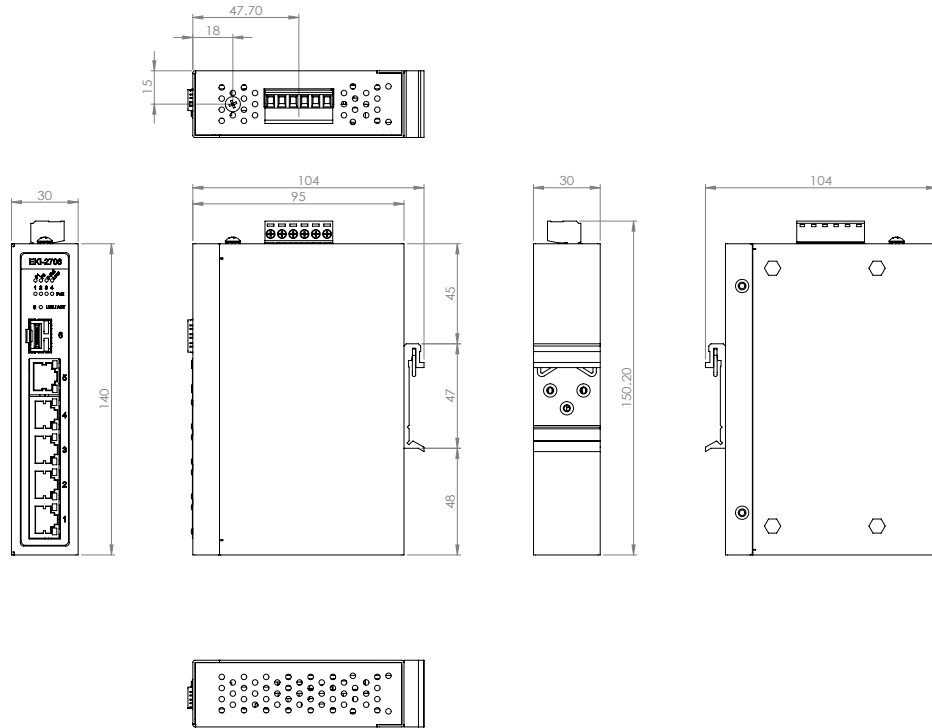

Panel Cut-out Dimensions: 114 x 152 x 59.6 mm (4.49" x 5.99" x 2.35")